


# Simple RII 442 configuration 4 Channel HD Replay with MI/MV/GA on Graphics Port and PVW on second SDI Output

Replay configuration. 4 HD SDI inputs, Codec i-frame DCT. SDI Output G - Preview (PVW). Graphics Port 1 uses MultiSkin for displaying Main Interface (MI), Multiviewer (MV) or Game Analyzer (GA) interface.

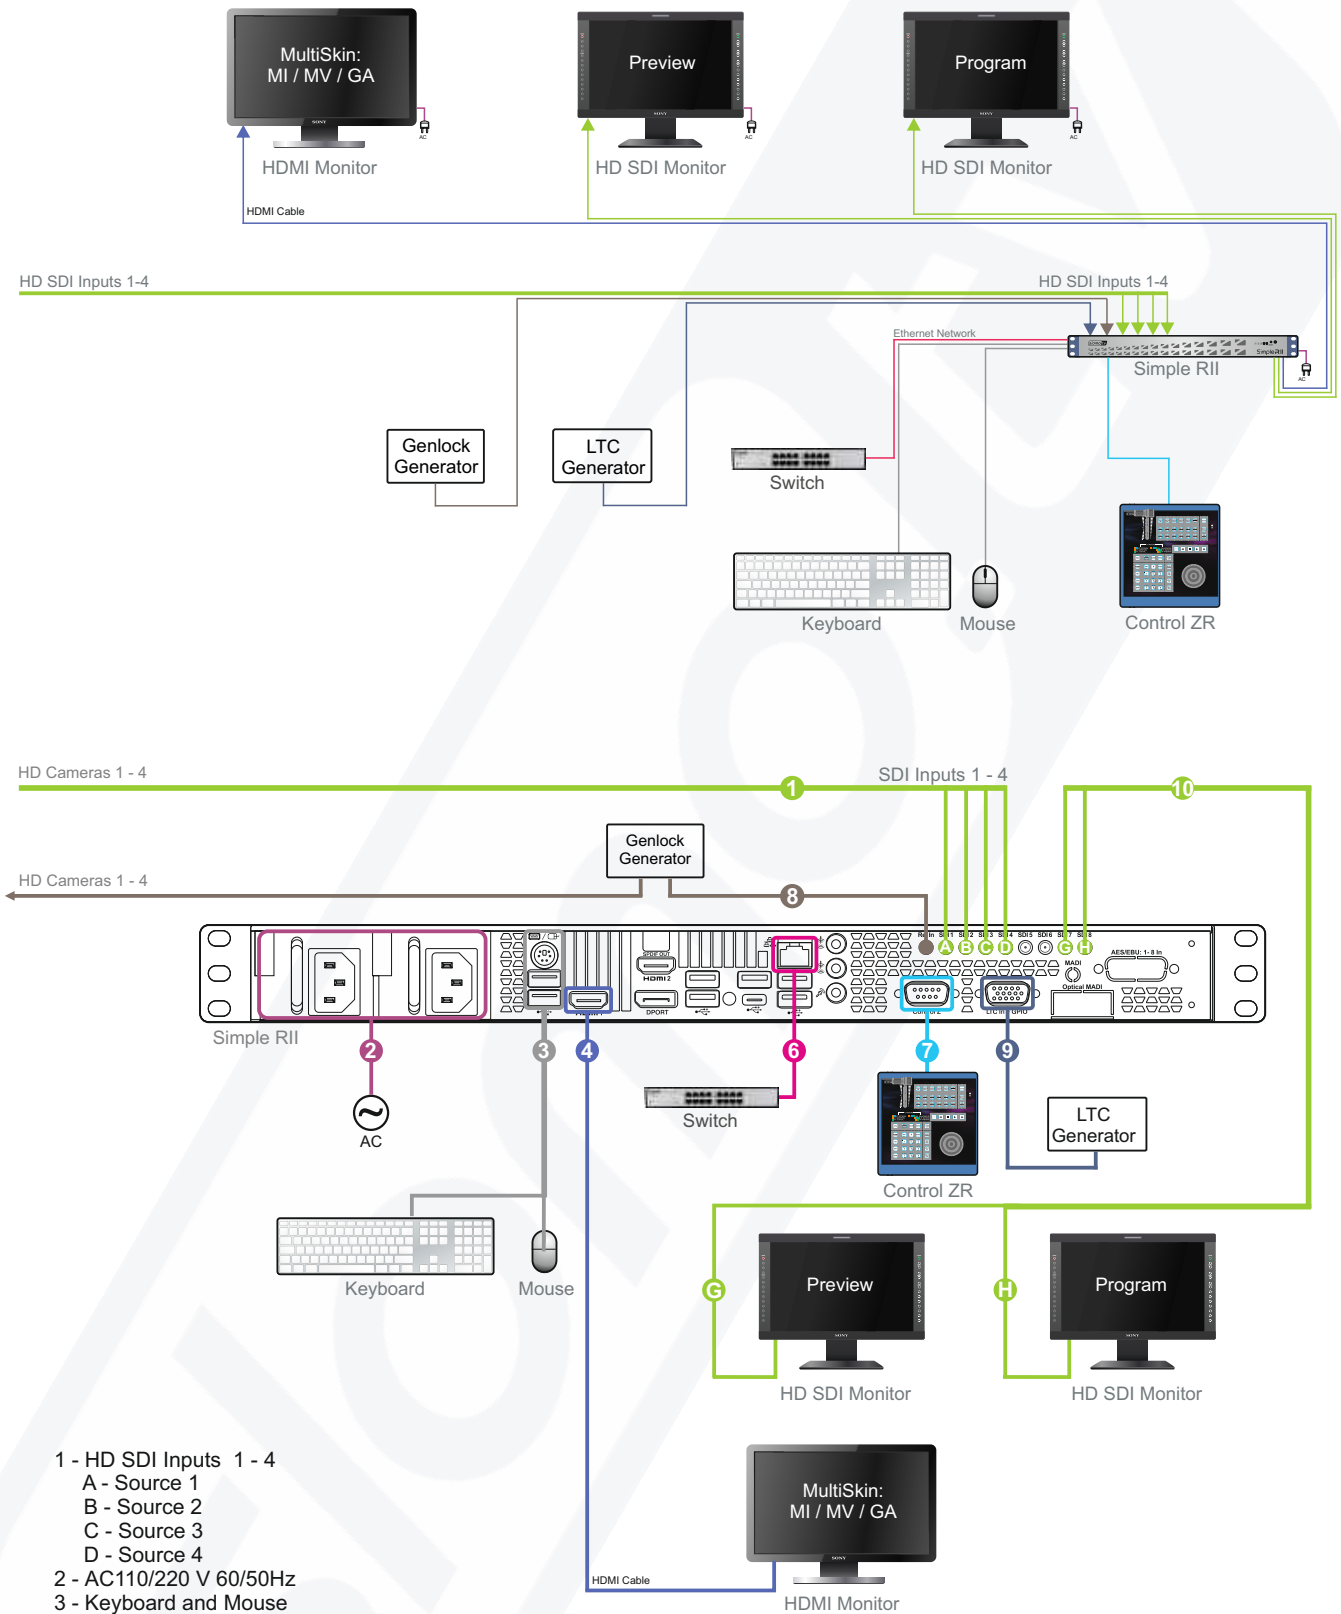

- 1 - HD SDI Inputs 1 - 4  
A - Source 1  
B - Source 2  
C - Source 3  
D - Source 4
- 2 - AC110/220 V 60/50Hz
- 3 - Keyboard and Mouse
- 4 - HDMI 1920 x 1080 - MultiSkin: MI / MV / GA
- 6 - 1GbE
- 7 - Control ZR Remote Control
- 8 - Reference Input
- 9 - LTC Input
- 10 - SDI Output G - Preview  
SDI Output H - Program

Use Slomo 900.003.043.10 Cable for BNC Connections 1, 8, 10

Use Slomo 900.020.040.01 Cable for LTC Input Connection